

HEAVY DUTY 3/2026

HGV NEWS + PROMOTION
01.09. - 31.12.2026

MISSION: **KLANN POSSIBLE** Time saving, safe, well thought out tools.

KL-1022-110 B / -120 B

NEW

**WHEEL CAPSULE /
AXLE NUT
SLOGGING WRENCH**

74
Top deals

OPERATION BOARD

Made in Germany



TIME SAVING

These tools especially save time and thus real money



SAFE WORK

With these tools the focus is particularly on safety during use



ONLY FROM GEDORE

These tools are protected by us by patent, utility model or design patent



MATERIAL-PROTECTING

These tools protect vehicle of spare parts from damage during removal and installation



COMMERCIAL VEHICLES

These tools are especially developed and suited for the use on commercial vehicles



TRANSPORTERS

These tools are especially developed and suited for the use on transporters



AGRICULTURE

These tools are especially designed and suitable for use on agricultural vehicles

KL-4999-420

WORKSHOP TROLLEY

with Hand Tools, HGV

Made in Germany



Universally applicable.

- Extensive range of commercial vehicle/agricultural machinery for professionals
- Tools in metric design
- Wide drawers with full extension
- Central locking with cylinder lock
- Safety lock for each drawer, one-hand operation

Content:

- 1/4" assortment (waf 4-13 mm, IN 4-8 and T8-T25)
- 1/2" assortment (waf 10-32 mm, T20-T60 long, IN 6-19 and IN long 6-14, waf 17-32 mm power screwdriver inserts and telescopic ratchet)
- 3/4" assortment (waf 21-60 mm, E24 and IN long waf 14 mm and power screwdriver sockets waf 24-41 mm)
- Bit set and ratchet screwdriver
- Screwdriver sets (slotted 4.5-8, PH 1-4, T10-T40 and IN 2-10)
- Spanner sets (waf 6-41 mm + brake line and starter block spanners)
- Impact spanner sets (E18/E20/E24, hexagon waf 24/26/27 mm and 12-edge waf 19/21/24 mm)
- Extensive range of pliers
- Extensive range of impact and lever tools
- Extensive range of measuring, machine and cutting tools



Code	Part No.	Length	Width	Height	Load capacity (static)	Load capacity (dynamic)	Drawer type	Number of drawers	Colour	Contents	Weight
3418367	KL-4999-420	1,200 mm	635 mm	985 mm	1000 kg	750 kg	full extension	6	blue	302	200 kg

1504 XL-S-306



WORKBENCH

WITH AGRAR PROFESSIONAL TOOL ASSORTMENT

306 pieces

Ideally suitable for service and maintenance work on agricultural machinery, commercial vehicles and vans.

- Extensive socket spanner assortment in 1/4" and 1/2"
- Combination spanner kit waf 6-34 mm (cranked) and waf 10 - 41 mm (XL)
- Ring ratchet open-end spanner, starter block spanner and open double ring spanner
- Wide range of screwdrivers, pliers, impact tools and many more
- Completeness check due to 2 coloured foam inserts
- Large storage space with lower shelf and door
- Safety through heel protection for persons
- Central locking with cylinder lock
- Drawers with full extension, removable
- Safety locking per drawer, one-hand operation
- GEDORE trapezoidal axle design for smooth running, manoeuvrability, and directional stability



Mobile workbench
with a high-quality
multiplex worktop



High-performance tool
for agricultural machinery,
commercial vehicles and vans

Workbench with
high load-bearing
capacity

Extensive set
of 306 pieces

Code	Part No.	Number of drawers	Load capacity, drawer	Load capacity, heavy duty drawer	Load capacity (static)	Load capacity (dynamic)	Colour	Material	Length	Width	Height	Contents	Weight
3434834	1504 XL-S-306	9	40 kg	60 kg	1000 kg	750 kg	blue	Steel sheet	1,250 mm	630 mm	985 mm	306	175 kg

1504 XL-S-198

WORKBENCH WITH BASIC ASSORTMENT



Ideally suitable for service and maintenance work on agricultural machinery, commercial vehicles and vans.

- Extensive socket spanner assortment in 1/4" and 1/2"
- Combination spanner kit waf 6-34 mm
- Wide range of screwdrivers, pliers, impact tools, and many more
- Completeness check due to 2 coloured foam inserts
- Large storage space with lower shelf and door
- Safety through heel protection for persons
- Central locking with cylinder lock
- Drawers with full extension, removable
- Safety locking per drawer, one-hand operation
- GEDORE trapezoidal axle design for smooth running, manoeuvrability, and directional stability

Code	Part No.	Number of drawers	Load capacity, drawer	Load capacity, heavy duty drawer	Load capacity (static)	Load capacity (dynamic)	Colour	Material	Length	Width	Height	Contents	Weight
3434826	1504 XL-S-198	7	40 kg	60 kg	1000 kg	750 kg	blue	Steel sheet	1,250 mm	630 mm	985 mm	198	154 kg


2005 XL-S-466

TOOL TROLLEY WITH CAR ASSORTMENT



Suitable for a wide range of maintenance and repair work on cars and vans.

- A comprehensive, extremely robust range of hand tools
- Ideal, mobile workstation
- Metric version
- 7 fully stocked drawers
- One large bottom drawer for storage
- Extra-wide drawers with full extension
- Safety lock on each drawer

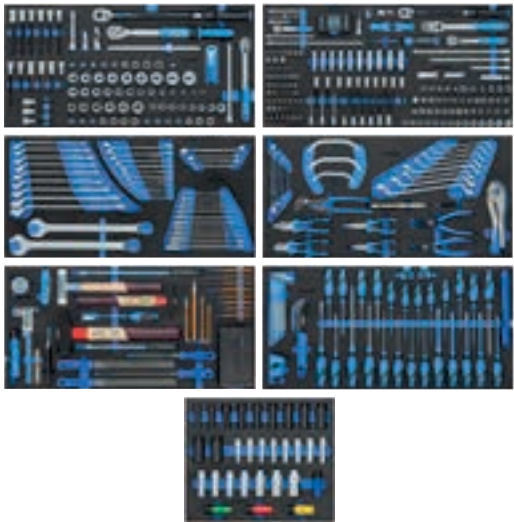

Code	Part No.	Load capacity, drawer	Load capacity, heavy duty drawer	Material	Length	Width	Height	Contents	Weight
3458946	2005 XL-S-466	60 kg	70 kg	Steel sheet	1,021 mm	605 mm	1,020 mm	466	150 kg

KL-0100-83 K

IMPACT SOCKET SET

3/4", 200 mm, 9-pieces

Universally suitable for wheel screw connections and other bolt connections.

- Robust 9-piece set in extra-long 200 mm design
- For loosening and tightening deep-seated bolt connections
- Impact wrench suitable inserts with holder for locking pin
- Incl. 1" to 3/4" reducer

Content:

1x Impact socket, 27 mm (waf)
1x Impact socket, 30 mm (waf)
1x Impact socket, 32 mm (waf)
1x Impact socket, 33 mm (waf)
1x Impact socket, 36 mm (waf)
1x Impact socket, 38 mm (waf)
1x Impact socket, 41 mm (waf)
1x Impact socket, 46 mm (waf)
UNIVERSAL 1x reducer 1" - 3/4"



Code	Part No.	Profile	Drive (square)	Insert, length	Storage	Length	Width	Height	Contents	Weight
3518450	KL-0100-83 K	Hexagon	3/4" 1"	200 mm	Case	250 mm	220 mm	130 mm	9	17 kg

32 EMU-2

SOCKET WRENCH SET

3/4", 14 pieces, hexagon, 22-50 mm

Made in Germany



- With hexagonal socket spanners
- Size 22 / 24 / 27 / 30 / 32 / 36 / 38 / 41 / 46 / 50 mm (waf)
- With fine toothed, dial change ratchet
- In GEDORE blue sheet steel case

20 3/4" mm



Code	Part No.	Ring profile	Drive (square)	Material	Length	Width	Height	Contents	Weight
6280340	32 EMU-2	UNIT-DRIVE	3/4"	Chrome-vanadium steel 31CrV3	525 mm	525 mm	73 mm	14	11.4 kg



MULTIFUNCTION BIT RATCHET SET

- Multifunctional 1/4" bit ratchet set: 5 features, 1 tool
- Maximum versatility: bit ratchet, 1/4" square ratchet, T-handle, swivel head and extension
- For bits and 1/4" sockets with adapter
- Compact, flexible bit ratchet with 180° swivel head
- Extension at the handle end makes deep fastenings easy to reach
- T-handle function: guide the extension (laser-marked area) through the ratchet head (white dot)
- Very quick and precise adjustment via push button
- With compact holder for mobile use
- High torque: ratchet max. 65 Nm; 1/4" handle end max. 50 Nm

NEW

**Innovative 180° flex-head ratchet
with extension – 5 main functions**

**Usable as a bit
ratchet and a
1/4" ratchet
(with adapter)**



**With T-handle for
comfortable fastening –
more application options**



**In a compact
holder for secure,
mobile use**



Code	Part No.	Drive (hex)	Length	Width	Height	Weight
3543870	671 M-003	1/4"	118 mm	25 mm	18 mm	100 g

2093 U-20

REVERSIBLE RATCHET

1/4", 2C handle, 127 mm



Made in Germany



- Wide-ranging applications in industry and the automotive sector
- Small, drop shaped head for confined areas
- Fine-toothed (40 teeth), with lever change and push-button release
- Return angle of 9 degrees
- Non-slip 2-component handle with hanging hole

6,3 1/4"



Code	Part No.	Output drive (square)	Return angle	Material	Length	Width	Height	Weight
1703749	2093 U-20	1/4"	9°	Chrome-vanadium steel 31CrV3	130 mm	24 mm	21 mm	100 g

1993 U-20

REVERSIBLE RATCHET


1/2", 2C handle, 270 mm



Made in Germany



- Wide-ranging applications in industry and the automotive sector
- Small, drop shaped head for confined areas
- Fine-toothed (60 teeth), with lever change and push-button release
- Return angle of 6 degrees
- Non-slip 2-component handle with hanging hole



1/2" 12,5



Code	Part No.	Output drive (square)	Return angle	Material	Length	Width	Height	Weight
1436686	1993 U-20	1/2"	6°	Chrome-vanadium steel 31CrV3	275 mm	40 mm	38 mm	0.5 kg

1993 TU-10

TELESCOPIC REVERSIBLE RATCHET

1/2"



Made in Germany



- Long lever arm for high torques
- Adjustable from 400 to 600 mm in eight steps
- With push button release
- Locks in the middle position
- Non-slip 2-component handle

1/2" 12,5



Code	Part No.	Output drive (square)	Locking	Torque (max.)	Return angle	Material	Length	Width	Height	Weight
3041859	1993 TU-10	1/2"	Ball safety device	600 Nm	7,5°	Chrome-vanadium steel 31CrV3	405 mm	48 mm	48 mm	1.3 kg

KL-4007-260

DEFLECTION ADAPTER KIT

90°, 6-pieces



Application example, not included in the scope of delivery



1/4" 1/4"
3/8" 3/8"
1/2" 1/2"



Universally applicable in everyday workshop use.

- Unique deflection adapter kit for 1/4", 3/8" and 1/2" drives
- For reaching extremely difficult bolt connections
- Enables an offset of the drive axle and deflection of the drive force
- Can also be combined with other adapters and extensions
- 2x deflection adapters each per size



Application video

Suitability: universal

Code	Part No.	Drive (square)	Angle	Storage	Contents	Weight
3517330	KL-4007-260	1/4" 3/8" 1/2"	90°	Plastic insert	6	250 g

KL-1005-100 A

HUB PULLER SET, HGV

Made in Germany



Universal fit for commercial vehicles (as well as wheel hubs with integrated compact wheel bearing) with removable hub cap.

For axle systems with a pitch hole diameter of 8x275 mm and 10x335 mm for BPW, SAF, and ZF.

- For a quick and professional pulling of the wheel hub directly on the vehicle
- Especially powerful in combination with the 28 t hydraulic cylinder
- Additional drive parts required!
(For hydraulic drive, see page 11)

Suitability: universal, especially for:


MERCEDES MAN DAF IVECO RENAULT SCANIA VOLVO

Code	Part No.	Width, inside (Press Frame)	Length, inside (Press Frame)	Wheel stud circles	Drive type	Load (max.)	Weight
3283666	KL-1005-100 A	178 mm - 320 mm	152 mm	8 x 275 mm 10 x 335 mm	hydraulic / mechanical	28 t	22 kg

KL-1005-111 Z

HUB PULLER*HGV mechanical*

Made in Germany

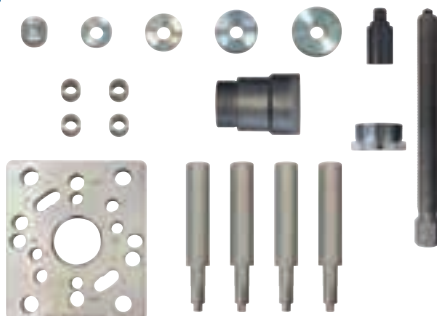

Universally suitable for commercial vehicle wheel hub/bearing units with removable hub cap.

- For professional pulling of wheel hub/bearing units
- Hydraulic drive with 28 t cylinder is also possible (accessories required)

Note: Hydraulic drive also possible.

Required drive parts:

KL-0040-2800 - Hydraulic cylinder 28 t

KL-0215-35 M28 - Hydraulic pump

KL-0040-2812-1 - Pressure spindle M24

KL-0040-2812-5 - Pressure nut M24

KL-0039-1002 - Mounting adapter



Application video

Suitability: universal, especially for:

MERCEDES MAN VOLVO IVECO RENAULT NEOPLAN DAF WIELTON

Code	Part No.	Wheel stud circles	Drive type	Load (max.)	Weight
3418596	KL-1005-111 Z	10x120mm 10x122mm 10x143mm 10x165mm 10x168mm 12x144mm 12x145mm 12x164mm 12x168mm 14x138mm 14x144mm 10x225 mm	mechanical	28 t	21.5 kg

KL-1029-300

WHEEL HUB LIFTING TOOL, HGV

Made in Germany



Universally suitable for commercial vehicles, semi-trailers and trailers.

- For easy and back-friendly lifting of heavyweight wheel hubs
- One-person operation
- Stepless adjustment to keep the wheel hub in balance
- Versatile use, e.g. when changing brake discs

Suitability: universal

Code	Part No.	Bore-Ø	Adjustment range	Version	Load (max.)	Total length	Weight
3413071	KL-1029-300	23 mm	110 mm	stepless	300 kg	148 mm	1.1 kg

COMMERCIAL VEHICLE PRESS FRAME TOOL

Pressing in and out bearings, bushings and bolts is always a major challenge in the commercial vehicle sector. Often, entire vehicle components have to be removed in order to replace the spare part on the stationary press.

With this large, mobile press frame, many of these parts can be replaced directly on the vehicle. Saving time and money!

Made in Germany

For changing bearings, bushings and bolts, e.g. on Outriggers/lifting arms, lift systems, chassis parts, etc.

- Powerful hydraulic drive with up to 28 tonnes
- Mechanical drive possible
- Adjustable in width and length
- Expandable with KL-0039 series sleeves
- Can also be used as a floor press
- For drive parts see page 3

Bearings / Bushings




KL-1039-111
Press frame, commercial vehicle, 28 t
(with bridge KL-1005-100 A)



kingpin

variable size

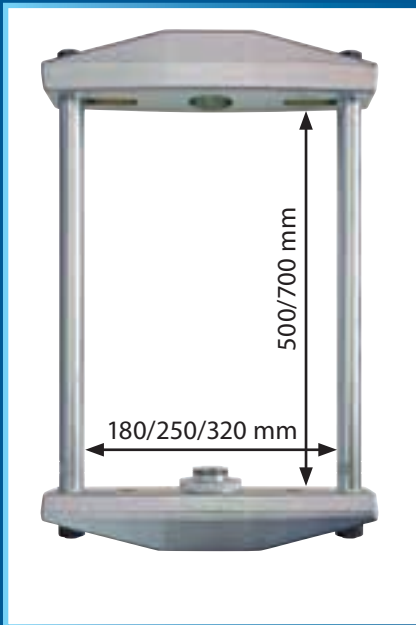

QR code website



KL-1039-111

Code	Part No.	Load (max.)	Width, inside (Press Frame)	Width, inside 2 (Press Frame)	Width, inside 3 (Press Frame)	Length, inside (Press Frame)	Length, inside 2 (Press Frame)	Drive type	Weight
3275299	KL-1039-111	28 t	180 mm	250 mm	320 mm	500 mm	700 mm	hydraulic / mechanical	49 kg

MODULO ASSEMBLY TROLLEY

The MODULO assembly trolley from GEDORE is a system that saves time and generates additional revenue!

Process	Time without MODULO	Time with MODULO
Silent bloc replacement	1 – 2 hours	30 minutes
Disconnect ball joint	0.5 – 1 hour	10 minutes
Wheel hub 19-22.5" removal	2 – 4 hours	30 minutes
Wheel hub 8-14" removal	2 – 4 hours	30 minutes
axle bolt	2 – 4 hours	30 minutes
Bolt removal/installation	1 – 2 hours	30 minutes

This saves you an average of 2 hours per job.
With 50 such jobs per year, that means 100 hours of additional income for your workshop!



Range of hand tools and hydraulic drive parts.

- Various drive parts for driving the tool kits
- Including helpful hand tools



Assortment with ball joint pullers, Silent bloc replacement, hyd. cyl. 28 t, steering rod wrench, wheel hub lifting tool.

- Removal and installation of slotted and closed silent blocs
- Pulling off ball joint connections on steering and axle systems
- Loosening and adjusting tie rod ends
- Lifting heavy wheel hubs by means of a workshop crane



28 t press frame, large and small wheel hub pullers, range of pressure and supporting sleeves.

- Forcing off wheel hubs with a removable hub cover
- For wheel hubs with a hole circle diameter of 8x275 mm and 10x335 mm
- For compact bearing wheel hubs with a hole circle diameter of 10x120 to 14x144 mm
- Forcing out and pressing in bushings, bearings and bolts

QR Code
Website



KL-4999-820

Made in Germany

Code	Part No.	Length	Width	Height	Load capacity (static)	Load capacity (dynamic)	Drawer type	Number of drawers	Colour	Contents	Weight
3425835	KL-4999-820	1,200 mm	635 mm	985 mm	1000 kg	750 kg	full extension	4	blue	93	249 kg
3532682	KL-4999-820/AT	1,200 mm	635 mm	985 mm	1000 kg	750 kg	full extension	4	Anthracite	93	249 kg

KL-4999-1280

SURFACE-MOUNT WORKTOP

Fits to the MODULO workshop trolley
KL-4999-12x, 1507 XL, KL-4999-250, -260, -270 A, -320, -420, -820 as well as the anthracite-versions.

- For mounting on the wooden worktop
- Extremely robust, impact-resistant and oil-resistant
- With 2x can shelves and 8x storage compartments



Made in Germany



Code	Part No.	Internal width	Interior depth	Weight
3428001	KL-4999-1280	1202 mm	639 mm	3.2 kg

KL-0040-2800

HYDRAULIC CYLINDER, 28 T



Application video



Made in Germany



- The hollow piston cylinder can be used for pulling and pushing
- For removal and installation of cardan shafts, silent blocks, wheel bearings / wheel hubs and suspension joints.

Suitability: universal

Code	Part No.	Connection thread (pull side)	Connection thread (press side)	Internal thread	Permissible force (max.)	Stroke	Oil pressure (max.)	Drive type	Cylinder-Ø	Length	Connection thread for hydraulic coupling
2016893	KL-0040-2800	M42x2	2 3/4"-16 UN	M24	285 kN (28 t)	50 mm	700 bar	hydraulic	99 mm	235 - 285 mm	3/8" NPT

Made in Germany



KL-0040-2812-1

PULL / THRUST SPINDLE, hydraulic, M24

- For the hydraulic drive of various tool kits
- Only in combination with hydraulic cylinder KL-0040-2800

Suitability: universal



Code	Part No.	Thread	Drive (hex)	Load (max.)	Spindle length (total)	Thread length
2370824	KL-0040-2812-1	M24	13 mm	28 t	590 mm	545 mm

KL-0040-2812-2

CLAMPING NUT, Ø 42mm, M24

- For the hydraulic drive of various tool kits
- Only in combination with a suitable spindle

Suitability: universal



Code	Part No.	Thread	Drive (hex)	Outer Ø	Angle	Length
2144700	KL-0040-2812-2	M24	36 mm	42 mm	70°	70 mm

Made in Germany



KL-0040-2812-5

THRUST PIECE, M24, Ø 20.5mm

- Is required in order to use spindle KL-0040-2812-1 as a thrust spindle

Suitability: universal



Code	Part No.	Drive (hex)	Outer Ø	Drive type	Length
3052346	KL-0040-2812-5	36 mm	40 mm	hydraulic / mechanical	73 mm

KL-0215-36 M28

HYDRAULIC PUMP, Pneumatic, 28 t

- Can be used to drive a hydraulic cylinder
- Compressed air is used to drive the hydraulic pump
- Operation is via a foot pedal with 3 settings for pumping, holding and unloading
- Both hands are free to work.

Suitability: universal



Code	Part No.	Operating pressure	Working pressure (max.)	Drive type
2478730	KL-0215-36 M28	8-12 bar	700 bar	pneumatic

WHEEL CAPSULE / AXLE NUT SLOGGING WRENCH

NEW

Universally suitable for axle nuts, hub caps and grease caps.

- For easy loosening and tightening of axle nuts / hub caps
- Integrated striking edge for loosening tightly seized fastenings
- Also suitable for hard-to-reach areas
- Torque tightening possible (3/4")
- Includes engraved torque conversion formula

Suitability: universal



Precise
torque tightening

Integrated
striking edge

3/4" mounting
for high torque
transmission



Code	Part No.	Profil	Size (waf)	Drive (square)	types of axles	Length	Weight
3476855	KL-1022-110 B	Special profile	110 mm	3/4"	BPW ECO/BPW ECO Plus	305 mm	1.8 kg
3476871	KL-1022-120 B	Special profile	120 mm	3/4"	BPW ECO/BPW ECO Plus	305 mm	1.8 kg

KL-1020-40

6-PIN LOCK NUT SOCKET

with Guide Tube

Ø 91mm



Made in Germany



Suitable for Mercedes vehicles (locknut A 976 356 00 26) and MAN.

- For unscrewing and tightening the fastening nuts
- For example on the front or rear axle as well as on the gearbox or differential flange
- Various base bodies and guide tubes can be combined

Suitability: **MERCEDES** **MAN**


Code	Part No.	Drive (square)	Outer Ø	Outer Ø, guide tube	Number of pins	Journal width	Version	Weight
2451123	KL-1020-40	3/4"	109.5 mm	58 mm	6	7.5 mm	with guide tube	3.2 kg

KL-1020-41 A

6-PIN LOCK NUT SOCKET

with Guide Tube

Ø 117mm

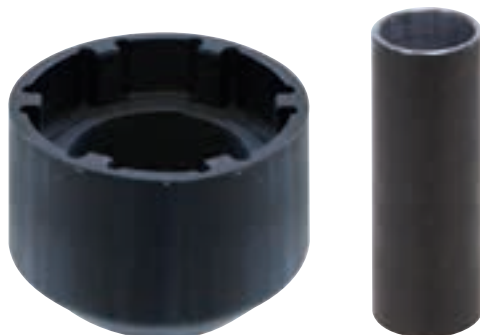

Made in Germany



Fits MAN vehicles with locknut 81.90620-0092.

- For loosening and tightening the locking nut
- e.g. on the front or rear axle and on the gearbox or differential flange
- Various base bodies and guide tubes can be combined

Suitability: **MAN**

Code	Part No.	Drive (square)	Outer Ø	Outer Ø, guide tube	Number of pins	Journal width	Version	Weight
2691809	KL-1020-41 A	3/4"	147 mm	66.5 mm	6	11.6 mm	with guide tube	7.5 kg

KL-1020-42

PIN LOCK NUT SOCKET

ZF-Axle, Ø 122.5 mm

Suitable for ZF axles (125 mm dia. / 139 mm dia.), for example Mercedes vehicles with the lock nut A 000 990 32 60).

- For unscrewing and tightening the axle nut

Suitability: universal, especially for:

MERCEDES



Made in Germany



Code	Part No.	Drive (square)	Outer Ø	Number of pins	Journal width	Weight
3221385	KL-1020-42	3/4" 1"	138.5 mm	6	10.5 mm	5.3 kg

THREAD RE-FORMING TOOL SET


THREAD RESET®

Right-hand/left-hand thread (M50-M100)


Universally fits all M50 - M120x1.5 right-hand and left-hand threads.

- QUICK, PROFESSIONAL, and CHIPLESS, simply EFFICIENT!
- Simple and quick rethreading of external threads directly on the vehicle
- Time-consuming and costly axle replacements in case of damaged axle threads are no longer needed
- Chipless rethreading of the thread by rolling (forming, pressing, shaping)
- No material removed, in comparison to thread cutting and filing
- Original geometry and strength is completely maintained
- Surface on the thread is additionally compacted again
- Thread remains up to 2 times higher dynamic load capacity
- Further thread roller sets also available as accessories

THREAD RESET®

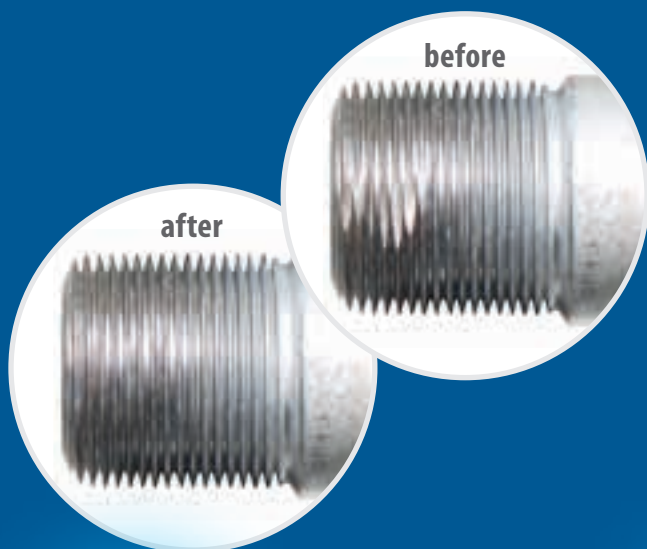


Application video

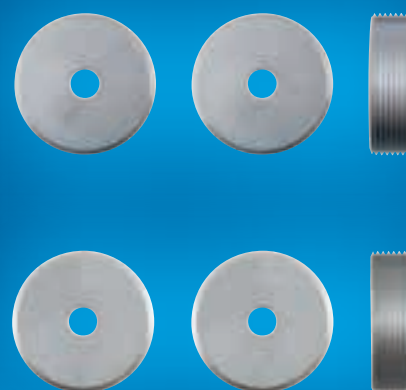

Code	Part No.	for Thread	Thread type	Pitch	Weight
3436217	KL-0173-460 K	M50 – M120	Right-/Left-hand thread	1.5 mm	3 kg

KL-0165-3 KA

BALL JOINT SEPERATING SET (with 6 forks)

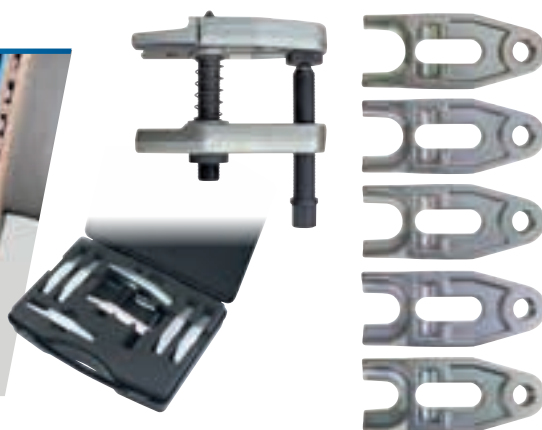

Made in Germany



Universal fit for commercial vehicles and vans.

- For seperating ball joint connections on axle and steering systems
- Variable due to exchangeable forks
- High stability
- Ideal release pressure point and adjustable tilting adjustment

Content:
6 Forks with opening
from 30 to 47 mm



Application video


Suitability: universal, especially for:

DEUTZ-FAHR **JOHN DEERE** **LANDINI** **MAN** **MERCEDES** **VW** **FORD** **SCANIA** **VOLVO**

Code	Part No.	Size	Quantity adapters	Size (waf)	Storage	Length	Width	Height	Weight
2801817	KL-0165-3 KA	3	6	24 mm	Case	450 mm	360 mm	230 mm	15.5 kg

KL-1000-20 A

KING PIN PRESS 65t, with sleeve set

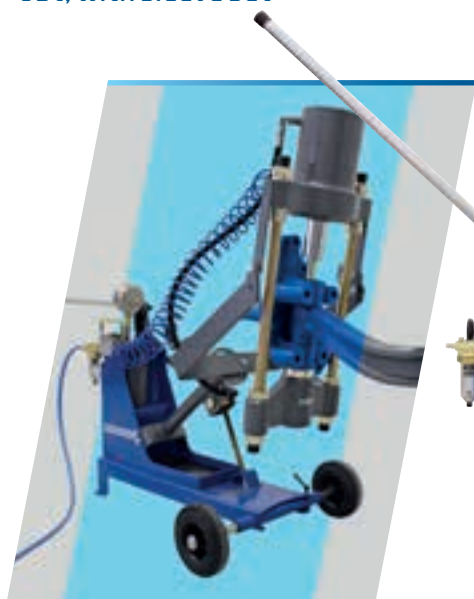

Made in Germany



Universal fit for commercial vehicles.

- For quick and professional forcing out and pressing in of kingpins on commercial vehicles

Advantages:

- Pneumatic high-speed hoist
- One-man operation
- Developed according to the newest safety requirements
- Universal fit, on the vehicle as well as free-standing
- Time saving
- Universally adjustable press frame which can be turned by 180°
- Easy and quick positioning on the vehicle due to the quick adjustment across three axes

Suitability:
universal



Application video


Code	Part No.	Width, inside (press frame)	Length, inside (press frame)	Swivel angle	Stroke	Press force	Air connection (max.)	Length	Width	Weight
3091600	KL-1000-20 A	290 mm	480 mm	180°	120 mm	65 t	13 bar	1,200 mm	650 mm	130 kg

KL-1000-502

SUPPORT SLEEVE WITH PULL BOLT for king pin (AWD)

Suitable for kingpins on commercial vehicles with all-wheel drive, e.g. Mercedes and MAN.

- For quick and professional removal of kingpins on the front axle
- Suitable for kingpins with M24x1.5 mm internal thread
- Save time by removing directly from the vehicle
- Additional drive parts are required for use!

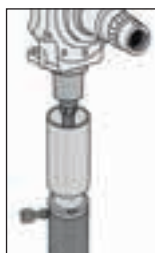

Suitability: universal, especially for:

MERCEDES **MAN**

Code	Part No.	Drive type	for internal thread	Weight
3521958	KL-1000-502	hydraulic / mechanical	M24x1.5	1.2 kg


KL-0169-60



TOE-MEASURING ROD

Universally suitable for cars, commercial vehicles and vans, etc.

- For a quick and simple toe difference measurement
- Measuring range adjustable via telescopic extension
- Measuring range can be extended by extension (accessories)

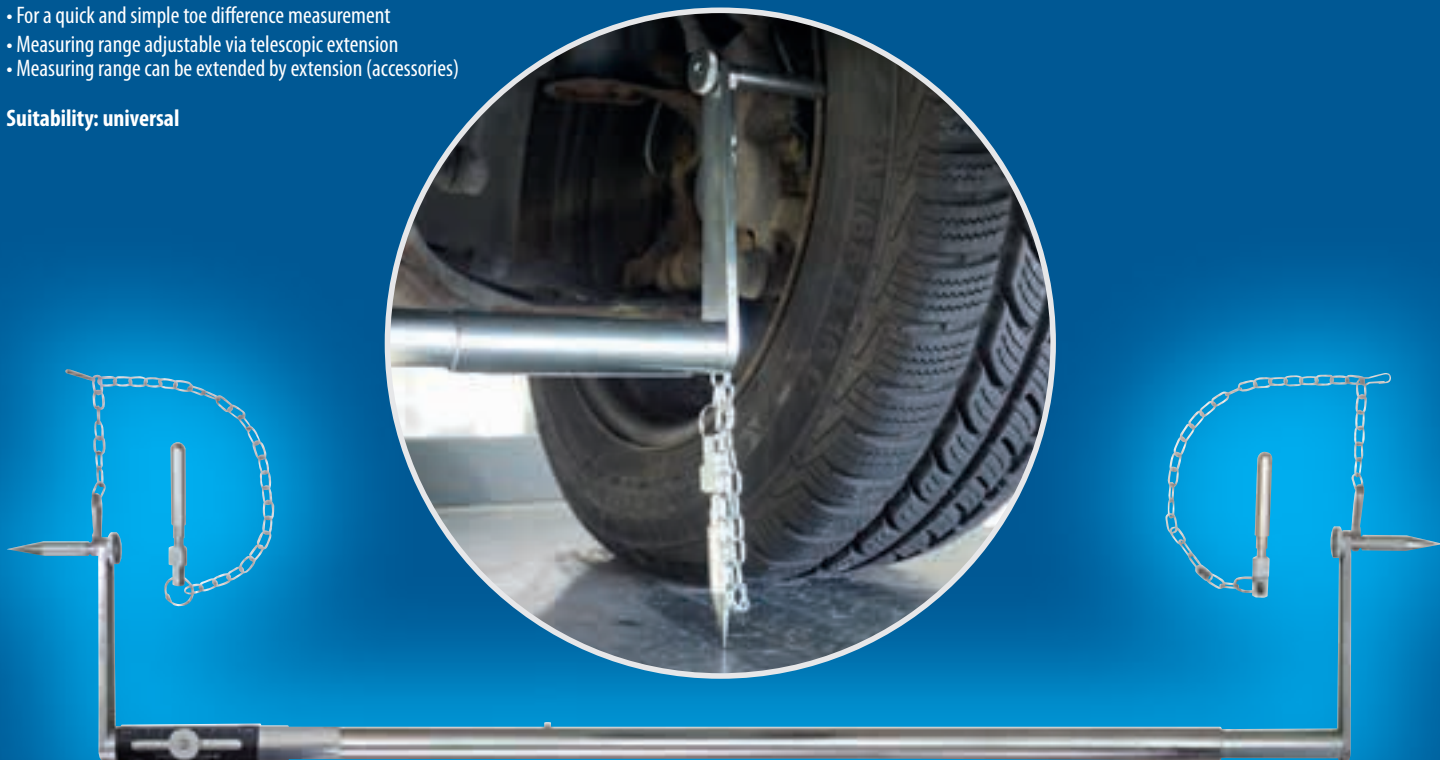Suitability: universal

Code	Part No.	Measuring range (min.)	Measuring range (max.)	Scale length	Length	Weight
3230295	KL-0169-60	950 mm	1500 mm	40 mm	1,500 mm	2.1 kg

KL-0169-61



EXTENSION ROD

Fits for toe measuring gauge KL-0169-60.

- To extend the measuring range from 1500 mm to a maximum of 2150 mm


Suitability: universal

Code	Part No.	Measuring range (min.)	Measuring range (max.)	Length	Weight
3230317	KL-0169-61	1600 mm	2150 mm	670 mm	450 g

KL-0169-830

TRACK ROD WRENCH KIT, 3/4"

Made in Germany

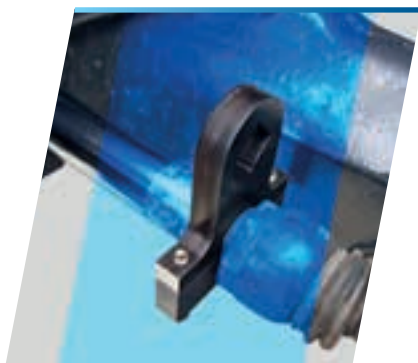

Suitable for push/track rods on commercial vehicles and agricultural machinery with spanner width 24, 27, 30, 32, 34 mm on the adjusting thread.

- For easy loosening and adjustment of stuck push/track rods
- Completely encloses the mating surfaces
- Even power transmission
- Open-end spanners are usually too wide or expand under the high force required
- No slipping or damaging • No replacement of the track rod

Suitability: universal, especially for:

CLAAS **DAF** **DEUTZ-FAHR** **EVOBUS** **MERCEDES** **NEOPLAN** **RENAULT**
FENDT **IVECO** **JOHN DEERE** **MAN** **SCANIA** **SOLARIS** **VOLVO**


Code	Part No.	Profile	for profile	Drive (square)	Version	Length	Contents	Weight
3462927	KL-0169-830	2 Flats	2-edge square hex	3/4"	split	120 mm	6	2.9 kg

KL-1009-20

SILENTBLOC TOOL

Ø 85 / 99 mm

Made in Germany

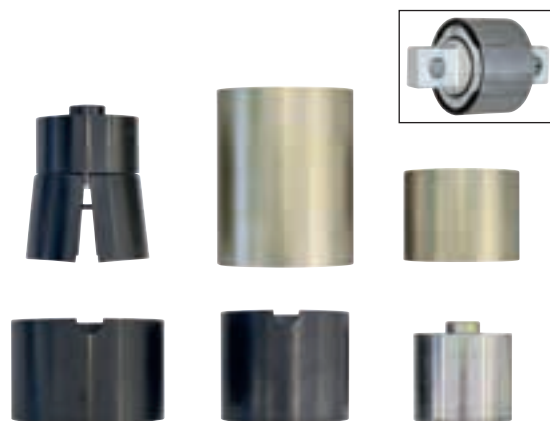

Suitable for Silent blocs on the rear axle stabiliser, e.g. on Mercedes-Benz Actros (MP4, MP5), Antos, Arocs, Atego (MP2), Econic (MP2), etc.

Especially for Silent blocs with OEM no. A 942 326 00 50 (installed = Ø 85 mm / removed = Ø 88 mm) and A 960 326 12 81 (installed = Ø 99 mm / removed = oval Ø 102x98 mm).

- For professional removal and installation of the blocs, done directly on the vehicle
- No costly replacement of the complete stabiliser bar
- Additional drive parts required!

Suitability: **MERCEDES**

Code	Part No.	for outer-Ø (fitted)	Drive type	Load (max.)	Weight
3533107	KL-1009-20	85 mm 99 mm	hydraulic	28 t	16 kg

KL-1011-111

SILENTBLOC TOOL

Ø 139mm

Made in Germany



Suitable for silent blocs with a bore diameter of 139 mm (silentbloc removed approx. 155mm); e.g. SAF INTRADISC plus air suspension axles.

- For a quick and safe removal/installation of the axle suspension
- Additional drive parts required!

Suitability: universal, especially for: **MERCEDES**




Code	Part No.	for outer-Ø (fitted)	for outer-Ø (removed)	Drive type	Weight
2450178	KL-1011-111	139 mm	155 mm	hydraulic	13.4 kg

KL-1011-121

SILENTBLOC TOOL

Ø 119mm, BPW

Made in Germany

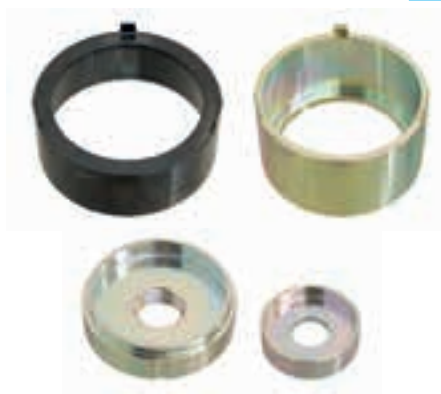

Suitable for silent blocks with an axle bore diameter of 119 mm (removed: 132 mm). E.g. on BPW ECO Air/ ECO Air Compact axles.

- For quick and professional insertion and removal on the wishbone
- For steel-rubber bushings No. 02.0314.38.00
- Additional mechanical drive parts necessary!

Suitability: universal, especially for: **BPW**

Code	Part No.	for outer-Ø (fitted)	for outer-Ø (removed)	Drive type	Version	Weight
3417158	KL-1011-121	119 mm	132 mm	hydraulic	eccentric	6.8 kg

8563-N-05

TORQUE WRENCH DREMOMETER

DNR-Set 3/4" 155-760 Nm

Made in Germany



- Torque wrench 155-760 Nm tightening range with test certificate; with extension tube
- Controlled clockwise tightening
- Incl. right-handed ratchet head 3/4"
- Maximum permissible of +/- 3 % (greater precision than the standard)
- Vernier scale - resolution 1.0 Nm



Application video

Code	Part No.	Drive (square)	Torque (min.)	Torque (max.)	Graduation	Vernier	Precision	Tightening direction	Length	Weight
3107043	8563-N-05	3/4"	155 Nm	760 Nm	10	1 Nm	+/- 3 %	Right	812 mm	5.5 kg

8576-01

TORQUE WRENCH DREMOMETER

DXL 520-1000 Nm

Made in Germany



- Controlled screw tightening in the range of 520 - 1000 Nm
- Classified according to DIN EN ISO 6789-2:2017 Type II Class A, incl. traceable test certificate
- 3/4" square drive with pin-locking mechanism
- Automatic short-path actuation with tactile impulse and audible signal
- Double scale with a scale division of 10 Nm and 10 lbf-ft
- Lightweight, robust and resilient, very workshop-friendly
- Extendable to reduce the user's working load
- Maximum precision even when subjected to extreme continuous use
- Long life cycles and tool lives
- Double-square drive for controlled bi-directional tightening

Code	Part No.	Drive (square)	Torque (min.)	Torque (max.)	Precision	Tightening direction	Length	Weight
7694360	8576-01	3/4"	520 Nm	1000 Nm	+/- 3 %	Left and right	812 mm	4.3 kg

Made in Germany



754-04

RATCHET HEAD, 3/4", clockwise

- Enables controlled torque tightening in combination with a DREMOMETER torque wrench
- Fine-pitched, sturdy ratchet head
- With a 3/4" square drive
- Clockwise model



3/4" 3/4"

Code	Part No.	Drive / Output drive (square)	Return angle	Material	Height
7680730	754-04	3/4"	10 °	Chrome-vanadium steel	80 mm

Made in Germany



754-06

RATCHET HEAD, 1", clockwise

- Enables controlled torque tightening in combination with a DREMOMETER torque wrench
- Fine-pitched, sturdy ratchet head
- With a 1" square drive
- Clockwise model



1" 1"

Code	Part No.	Drive / Output drive (square)	Return angle	Material	Height
7680810	754-06	1"	10 °	Chrome-vanadium steel	95 mm

TORQUE WRENCH TORCOFIX TF-K

- Controlled screw tightening
- Adjustable, releasing and sturdy tubular torque wrench
- Classified in accordance with DIN EN ISO 6789-2:2017 Type II Class A
- Includes traceable test certificate (DIN EN ISO 6789-2:2017)
- For controlled right- and left-hand tightening
- New ergonomic handle
- With vernier scale for the Nm main scale to setting intermediate scale values
- Suitable for left- and right-handed users



Made in Germany



Code	Part No.	Drive (square)	Torque range (min./max.)	Vernier	Precision	Return angle	Tightening direction	Length	Weight
3278492	TF-K550	3/4"	110 Nm - 550 Nm	1 Nm	+/- 3 %	10 °	Left and right	965 mm	3.6 kg
3278514	TF-K850	3/4"	250 Nm - 850 Nm	1 Nm	+/- 3 %	10 °	Left and right	1,390 mm	5.6 kg

KL-4007-411

SWIVEL HEAD BREAKER BAR, 3/4", 980MM

Universally applicable.

- For extremely tight screw connections
- Extra long version
- With 180° articulation

Suitability: universal



Code	Part No.	Drive (square)	Profile	Swivel angle	Load (max.)	Version	Length	Weight
2941554	KL-4007-411	3/4"	square	180°	1,050 Nm	extra long	980 mm	3.5 kg

KL-1029-20 A

FORCING WHEEL PRESS / BODY PRESS

Made in Germany



Universal fit for commercial vehicles, municipal vehicles, agricultural machinery and passenger cars.

- For quick and powerful disassembling of stuck wheels
- Also suitable for various straightening work on body parts
- Compact design for narrow spaces
- Adjustable length due to thrust pieces, extensions and fine adjustment

Suitability: universal

Code	Part No.	Stroke	Load (max.)	Version	Drive type	Weight
3412865	KL-1029-20 A	15 mm	17 t	stepless	hydraulic	4.6 kg

KL-1028-2226 / -2232

CENTRING SLEEVE SET

Made in Germany



Suitable for many commercial vehicles.

- For a simple and smooth installation of commercial vehicle wheels
- The screwing and unscrewing is done with a 1/2" ratchet

Suitability: universal, especially for:

DAF FORD MAN MERCEDES
RENAULT SCANIA VOLVO

Code	Part No.	Mounting thread	Outer Ø	Drive (square)	Version	Length	Weight
1805134	KL-1028-2226	M22x1.5	26 mm	1/2"	conical	115 mm	0.5 kg
1901753	KL-1028-2232	M22x1.5	32 mm	1/2"	conical	115 mm	1 kg

KL-0115-210

WHEEL HUB GRINDER FOR STUDS

commercial vehicles

Made in Germany



For universal use on wheel hubs with wheel studs on commercial vehicles and vans.

- For quick cleaning of the rim contact surface
- Solid corrosion residues can be removed easily
- Patented quick-change holder for precise centring between the base body and the grinding disc

Suitability: universal



Code	Part No.	Drive (hex)	Outer Ø	Length	Weight
3463966	KL-0115-210	3/8"	57 mm	170 mm	900 g

THREAD RE-FORMING TOOL (M22X1.5)

Universally applicable on wheel studs, wheel bolts or other threads with M22x1.5.

- Quick and cost-saving rethreading of damaged threads
- The thread is formed back to its original geometry
- No material is removed in the process
- The strength of the wheel studs or the wheel bolts is completely maintained
- Compact design

Suitability: universal

THREAD RESET®



Application video

Code	Part No.	for Thread	Drive (hex)	Weight
3465020	KL-0173-662 A	M22x1.5	46 mm	150 g

KL-0100-6X

EXTRA LONG SOCKET, 3/4", 400 MM



**Special offer
while stocks lasts**



Fits commercial vehicle wheel hubs.

- For unscrewing and tightening wheel hubs

Suitability: universal, especially for:



Code	Part No.	Size (waf)	Profile	Drive (square)	Length	Weight
2874229	KL-0100-632	32 mm	hexagon	3/4"	400 mm	1.9 kg
2874237	KL-0100-633	33 mm	hexagon	3/4"	400 mm	2 kg

KL-1070-13X

DOUBLE-ENDED SLOGGING WRENCH

Made in Germany



- For simple unscrewing and tightening of stuck screw connections
- Unique impact spanner with double spanner profile
- Also suitable for hard-to-reach places
- Tightening of torque possible (3/4")
- Including engraved torque conversion formula

Suitability: universal



Code	Part No.	Profil	Size (waf)	Size 2 (waf)	Drive (square)	Length	Weight
3424766	KL-1070-1301	bi-hex	21 mm	24 mm	3/4"	235 mm	550 g
3434222	KL-1070-1302	bi-hex / Inner TX	19 mm	E24	3/4"	235 mm	600 g
3434257	KL-1070-1303	Inner TX	E18	E20	3/4"	235 mm	650 g
3478467	KL-1070-1304	bi-hex	27 mm	30 mm	3/4"	250 mm	650 g
3478408	KL-1070-1305	bi-hex	22 mm	26 mm	3/4"	243 mm	650 g

KL-1072-100

BRAKE CALIPER LIFTING DEVICE, HGV

Made in Germany



Universally suitable for approx. 90 % of the brake calipers on commercial vehicles, semi-trailers and trailers on the market.

- Allows easy and back-friendly lifting of heavy brake calipers with the help of a workshop crane.
- Precise angular positioning
- One-person operation


Suitability: universal

Code	Part No.	Load (max.)	Number of setting positions	for brake calliper position	Length	Width	Height	Weight
3415589	KL-1072-100	75 kg	8	0:00 to 5:00 and 7:00 to 12:00 o'clock	508 mm	316 mm	50 mm	2.1 kg

KL-0114-894

REAMER HEAD SET FOR ABS-SENSOR

Ø 18 mm (2 pieces)

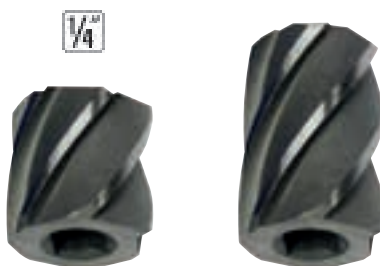

Made in Germany



Universally suitable for ABS sensor mounting holes with a bore diameter of 18 mm.

- For quick and professional cleaning of the mounting hole
- Drive with conventional 1/4" ratchet

Suitability: universal, especially for:

AUDI **BMW** **MERCEDES**
PEUGEOT **RENAULT** **VW**

Code	Part No.	Diameter	Drive (square)	Weight
3448886	KL-0114-894	18 mm	1/4"	90 g

36 2-200

STRAP WRENCH

Ø 200 mm, 285 mm



Made in Germany



- With strong, non-slip fabric strap
- Extra wide = 25 mm
- Chromed

Code	Part No.	for Ø	Tape width	Material	Length	Width	Height	Weight
6327400	36 2-200	200 mm	25 mm	Chrome-vanadium steel 31CrV3	295 mm	65 mm	37 mm	0.6 kg

KL-0122-193

OIL FILTER SOCKET UNIVERSAL

Ø 110-145mm



Universally suitable.

- For an easy loosening of oil filters and air dryer cartridges
- Also with narrow spaces

Suitability: universal



Code	Part No.	Drive (hex)	Drive (square)	for Ø (min.)	for Ø (max.)	Height	Weight
2967448	KL-0122-193	24,0 mm	1/2"	110 mm	145 mm	109 mm	1.9 kg



XXL PIN PUNCH SET

5-PIECE

Suitable for universal use on commercial vehicles and industrial machinery.

- Enables the precise, straight insertion and removal of split pins, bolts, etc.
- The long design offers an extremely long reach
- For very long or deeply seated parts
- Includes the standard diameters from Ø 8 to 16 mm
- Supplied in a handy roll-up pouch

Content:
Ø 8 / 10 / 12 / 14 / 16 mm



Extremely long
range design

For very long or
deep-set parts



Code	Part No.	Contents	Effective length	Length	Storage	Weight
3549100	KL-4701-100	Ø 8 / 10 / 12 / 14 / 16 mm	200 mm	350 mm	Tool roll	2.7 kg

KL-0840-100 K

DIGITAL BATTERY TESTER

Universally applicable for vehicles with 6/12/24 Volt LEAD, GEL, AGM, EFB and LITHIUM batteries.

- For professional checking and logging of the status of the battery, generator and starter
- Supports 9 battery standards according to EN, DIN, IEC, SAE, CA, CCA, BCI, MCA and JIS
- Testing of the battery in assembled or disassembled state
- Test log output via thermal printer
- Real-time monitoring inside the vehicle by means of a 2.50 m measuring line
- Simple, menu-guided operation in 13 languages
- Fully insulated crocodile clips and integrated reverse polarity protection



Suitability: universal

Code	Part No.	Voltage range	Nominal capacity (min. - max.)	for battery type	Display	Operating temperature	Battery capacity	Weight
3477185	KL-0840-100 K	6 V / 12 V / 24 V	1 Ah - 260 Ah	AGM battery, AGM spiral cell battery, Lead acid battery, EFB battery, GEL battery, Lithium battery	3.2"	0 - 50 °C	2,000 mAh	2.3 kg

KL-0880-20

INFRARED THERMOMETER

Universally applicable, e.g. in the industrial, construction and automotive sectors.

- For quick, non-contact temperature measurement
- Also for hard-to-reach objects and liquids
- Industrial quality, robust infrared thermometer
- High temperature measuring range from -50 to +550 °C
- Very high measuring accuracy due to adjustable emissivity detection
- Red 12-point laser target detection (can be switched off)
- Illuminated 1.5" LCD colour display
- Measured value hold function with min/max recording
- Adjustable LED warning light when temperature limit value is under/exceeded



Suitability: universal

Code	Part No.	Measuring range (min. - max.)	Measuring tolerance	Measuring time	Display	laser colour	Adjustable emissivity	Type of battery	Number of batteries	Automatic switch-off	Length	Width	Height
3475840	KL-0880-20	-50 °C – +550 °C	1.5 %	0.5 Sec	1.5"	red	0.1 to 1.0	AAA	2	30 Sec	95 mm	45 mm	145 mm



MICRO VIDEOSCOPE

Ø 3.9 MM WITH 4-WAY JOINT

Universally applicable on passenger cars, vans, commercial vehicles, buses, construction machinery and agricultural machinery.

- Enables quick and easy inspection of extremely difficult-to-access components
- For professional damage analysis on engines, transmissions and intake systems etc.
- Extremely slim Ø 3.9 mm micro camera with 11280 x 720 pixels
- Dust- and water-proof lens with adjustable LED illumination
- ±180° swivel angle in a 4-way articulation
- Live viewing via 5.0" HD colour display with zoom, rotate and mirror function
- Photo and video documentation with date and time stamp
- incl. 32 GB microSD card and powerful 3.7 V lithium-polymer battery (5000 mAh)
- Direct playback of photos and videos on the display

Suitability: universal

High battery capacity

1.2 m probe length allows extensive exhaust system inspection

4-way articulation enables inspection in all directions

Easy operation via joystick

Free of Charge!



Code	Part No.	Display	Resolution	Swivel angle	Cable Ø (max.)	Length (cable)	Number of LEDs	Battery	Temperature range	Storage	Weight
3517381	KL-0880-11 K	5.0"	1280 x 720 Pixel	+/- 180° (4-Wege)	3.9 mm	1.20 m	6	6,000 mAh	-10 °C - +60 °C	Hard-shell case	1.5 kg


R95600320

INSPECTION LAMP

- Mobile work lamp, ideal for use in all areas
- 5 switching functions for individually adjustable brightness
- Can be used both as an inspection lamp and as a torch
- Magnet and 180° rotating hook provide different holding options
- Enables flexible and mobile use as well as hands-free working
- LED can be used both folded in and out



GEDORE red

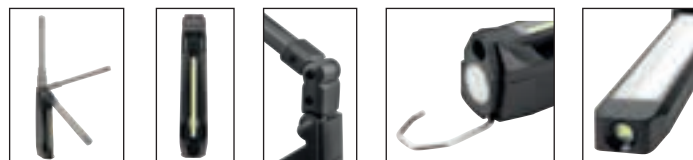

Code	Part No.	Type of illuminant	Number of lamps	Brightness	Battery capacity	Battery type	Lighting duration (max.)	Charging time	Power supply	Protection class	Colour	Material	Length
3301760	R95600320	LED	2	500 lm	2.500 mAh	Lithium-ion (Li-Ion)	12 h	4 h	Mikro-USB	IK 07	black	Plastic	320 mm

R95600128

STICK LAMP 150

- Ideal for targeted illumination of small work areas
- Compact design – lightweight and handy
- Switch functions: top LED (100 lm), main LED (150 lm), off
- IP54 & IK07 protection against dust and shock
- Long runtime
- USB-C charging: Quick charge function, approx. 2.5 h charging time, incl. charging cable



GEDORE red



Code	Part No.	Type of illuminant	Number of lamps	Brightness	Lighting duration (max.)	Charging time	Length	Width	Height
3301924	R95600128	LED	2	150 lm	3.5 h	2.5 h	128.2 mm	23.4 mm	17.9 mm

R47102004

ADAPTER SET**4-pieces**

- Versatile adapter sizes
- Includes 1/4", 3/8", and 1/2" adapters and 1/4" magnetic bit holder
- Robust material for high durability
- Fits all quick-change systems and standard drill chucks
- Suitable for machine use



GEDORE red



Code	Part No.	Material	Length	Width	Height	Contents	Weight
3301922	R47102004	Chrome-vanadium steel	77 mm	59 mm	17 mm	4	120 g

R47112102

BIT HOLDER SET**2-piece, 75 mm**

Suitable for Bits in 1/4" (6.3 mm) as well as sockets in 3/8" and 1/2".

- 2-piece set
- Includes one magnetic bit holder each
- Robust design for durable and reliable use



GEDORE red



Code	Part No.	Length	Width	Height	Contents	Weight
3301916	R47112102	75 mm	50 mm	22 mm	2	80 g

KL-1000-0115

RETAINING DEVICE FOR WHEEL HUBS, HGV


Made in Germany



Universally suitable for commercial vehicles, municipal vehicles and agricultural machinery.

- Allows the wheel head (wheel hub) to be professionally held against the wheel studs
- For loosening and controlled torque tightening

**Only while
stock lasts**

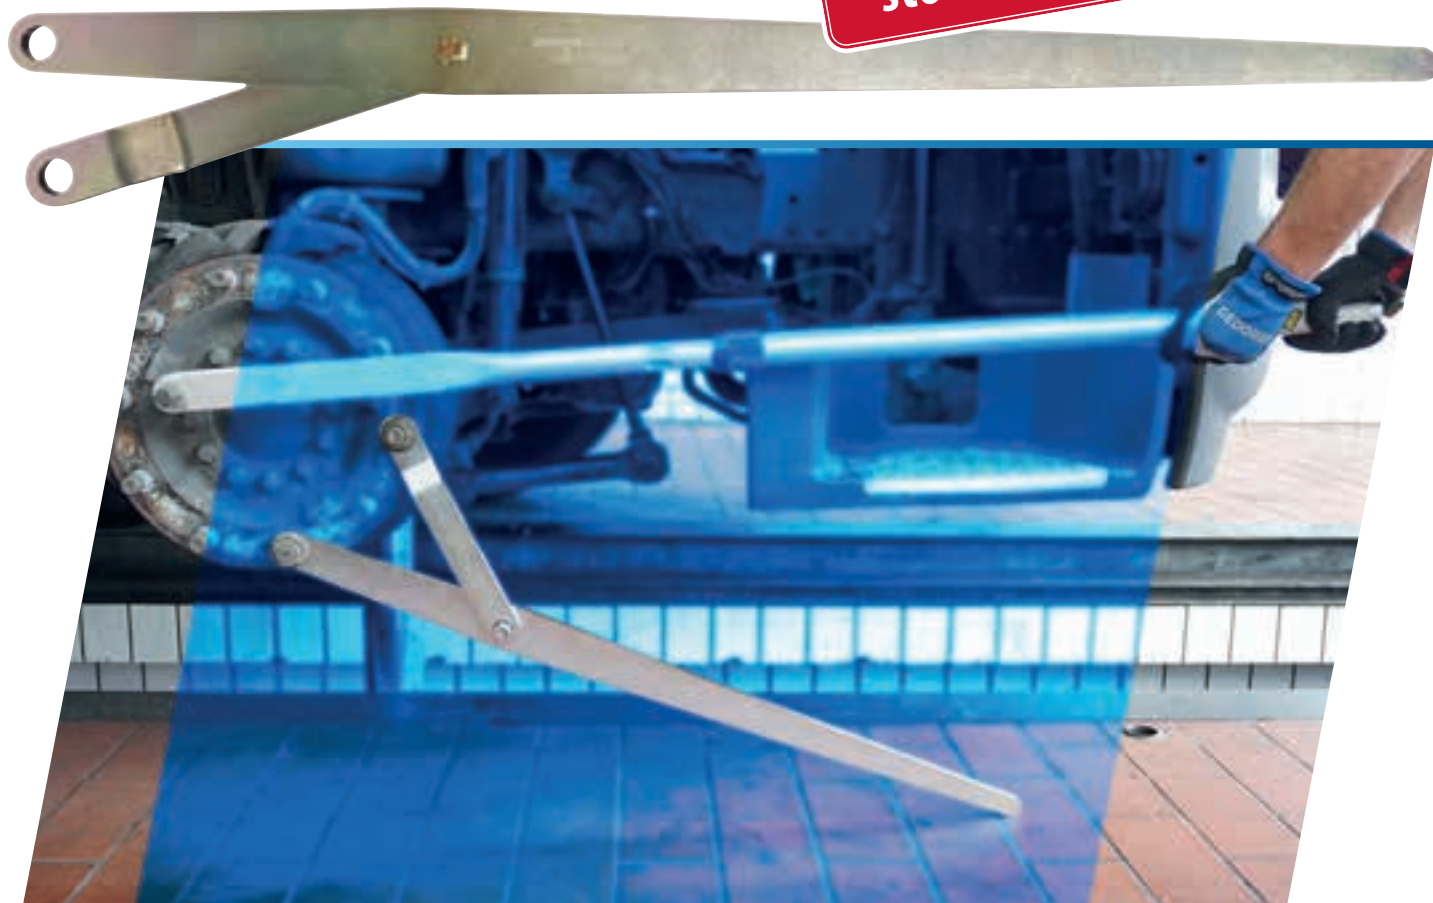

Code	Part No.	Length	Length, swivel arm	Bore-Ø	Weight
3413195	KL-1000-0115	990 mm	315 mm	23 mm	4.4 kg

Your dealer/stamp:

GEDORE
AUTOMOTIVE EXPERIENCE

HEAVY DUTY valid from
01.09. to 31.12.2026
Only while stock lasts.

Delivery without decoration.
Subject to technical changes.
For all details, please ask your local dealer.

GEDORE Automotive GmbH
Breslauer Straße 41 | 78166 Donaueschingen | GERMANY
Tel. +49 771 83223-0 | info.gam@gedore.com

gedore-automotive.com